

The FlexiForce™ Prototyping Kit allows engineers and designers the freedom to plug their preferred circuit module(s), easily make sensitivity adjustments, and gain confidence in how a FlexiForce sensor will behave in their prototype. The open-source nature of this kit makes for a more efficient progression to field-testing and the final embedded design.

## Features

- **Small and Affordable Kit**  
Saves engineers and designers the effort of building circuitry and other components for their FlexiForce-embedded proof-of-concept or prototype.
- **Interchangeable Analog Circuit Modules**  
Allows users to test the functionality of their FlexiForce sensors with ease.
- **Open-source Software Interface**  
Allows users to control loading, record sensor data, adjust sensitivity, and calibrate the sensor.

## Benefits

- Sensitivity adjustment made programmable via reference voltage. An on-board jumper easily selects the applied voltage.
- Resistor/capacitor values easy to swap out.
- Test FlexiForce sensors with the same methods used by Tekscan application engineers.
- Be more confident in FlexiForce sensor performance in your proof-of-concept and prototype.
- See instant feedback of sensor performance under different loading actuators and interfacing materials.

The FlexiForce Prototyping Kit comes with three interchangeable analog circuit modules



# Components

## The FlexiForce Prototyping Kit contains:

### (1) FlexiForce prototyping board

- Programmable reference voltage (sensitivity adjustment)
- Arduino nano chip
- 9 volt battery connector

### (3) Analog circuit modules


- Voltage divider, inverting op-amp, and non-inverting op-amp

### (2) FlexiForce sensors

- (1) A201-1
- (1) A201-25


### (1) Quickstart guide

- Includes link to download open-source software

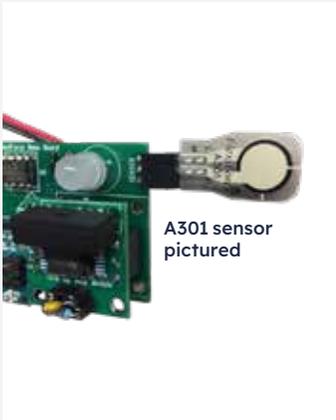

Compatible with FlexiForce standard-pinned sensors, including:


- A201 (included with kit purchase)
- HT201
- A301
- ESS301
- A401
- A502

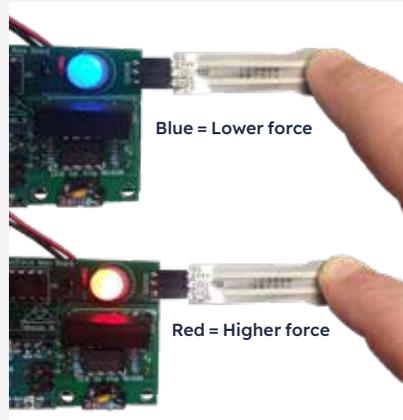

Relative force feedback is displayed on the Prototyping Kit via a blue-to-red LED light.

## Additional Specifications

	FlexiForce Prototyping Kit
Size L x W (mm (in.))	38 x 66 mm (6.00 x 6.00 x 9.14 in.)
Weight (g (lb))	28 g (0.06 lb)
Input	9V
Analog Output	0 - 5V
Digital Output	Up to 10 bit (8 bit default)
Communication	USB
Operating Temperature	-10 to 50°C (14 to 122°F)

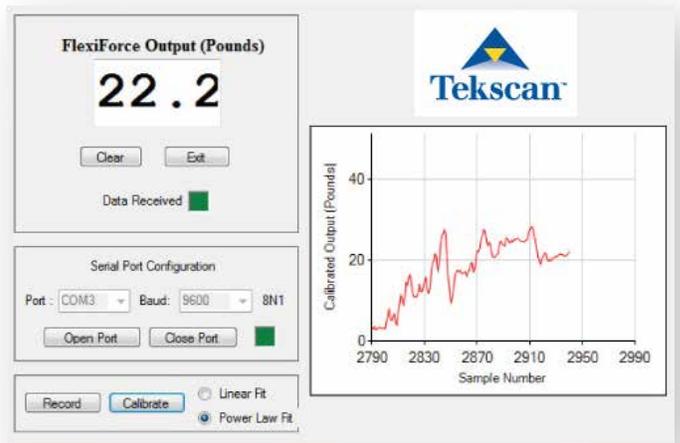

Save records on sensor performance for linearity, hysteresis, drift, and repeatability.

### Open-Source Software

Download the open-source software and other documentation

Free Download →

617.464.4500

1.800.248.3669

info@tekscan.com

tekscan.com

Sensor Datasheet  
SD\_Rev C\_121824

©Tekscan Inc., 2024. All rights reserved. Tekscan, the Tekscan logo, and FlexiForce are trademarks or registered trademarks of Tekscan, Inc.

Contact us  
for more information.  
Volume discounts available.